



**OHIO TURNPIKE AND  
INFRASTRUCTURE COMMISSION**

**ADDENDUM NO. 2**  
**ISSUED MARCH 23, 2020**


to  
**BID INVITATION NO. 4364**  
**A COMPLETE MAINTENANCE AGREEMENT FOR ELEVATORS LOCATED AT VARIOUS  
COMMISSION BUILDINGS FOR A PERIOD OF ONE (1) YEAR**

**OPENING DATE: 2:00 P.M. (EASTERN TIME), MARCH 25, 2020**

**ATTENTION OF BIDDERS IS DIRECTED TO:**

**ANSWERS TO QUESTIONS RECEIVED THROUGH 2:00 P.M. ON MARCH 23, 2020**

Issued by the Ohio Turnpike and Infrastructure Commission through Jennifer L. Stueber, Esq., General Counsel.


  
\_\_\_\_\_  
Jennifer L. Stueber, Esq.,  
General Counsel

3/23/2020  
Date

**ANSWERS TO QUESTIONS RECEIVED THROUGH 2:00 P.M. ON MARCH 23, 2020:**

**Q#5** Is there a chance anyone could take a picture of the elevator controller at the Mahoning Valley or Glacier Hills Plaza? This will give us an indication of the type of equipment there.

**A#5** Two pictures appear below.

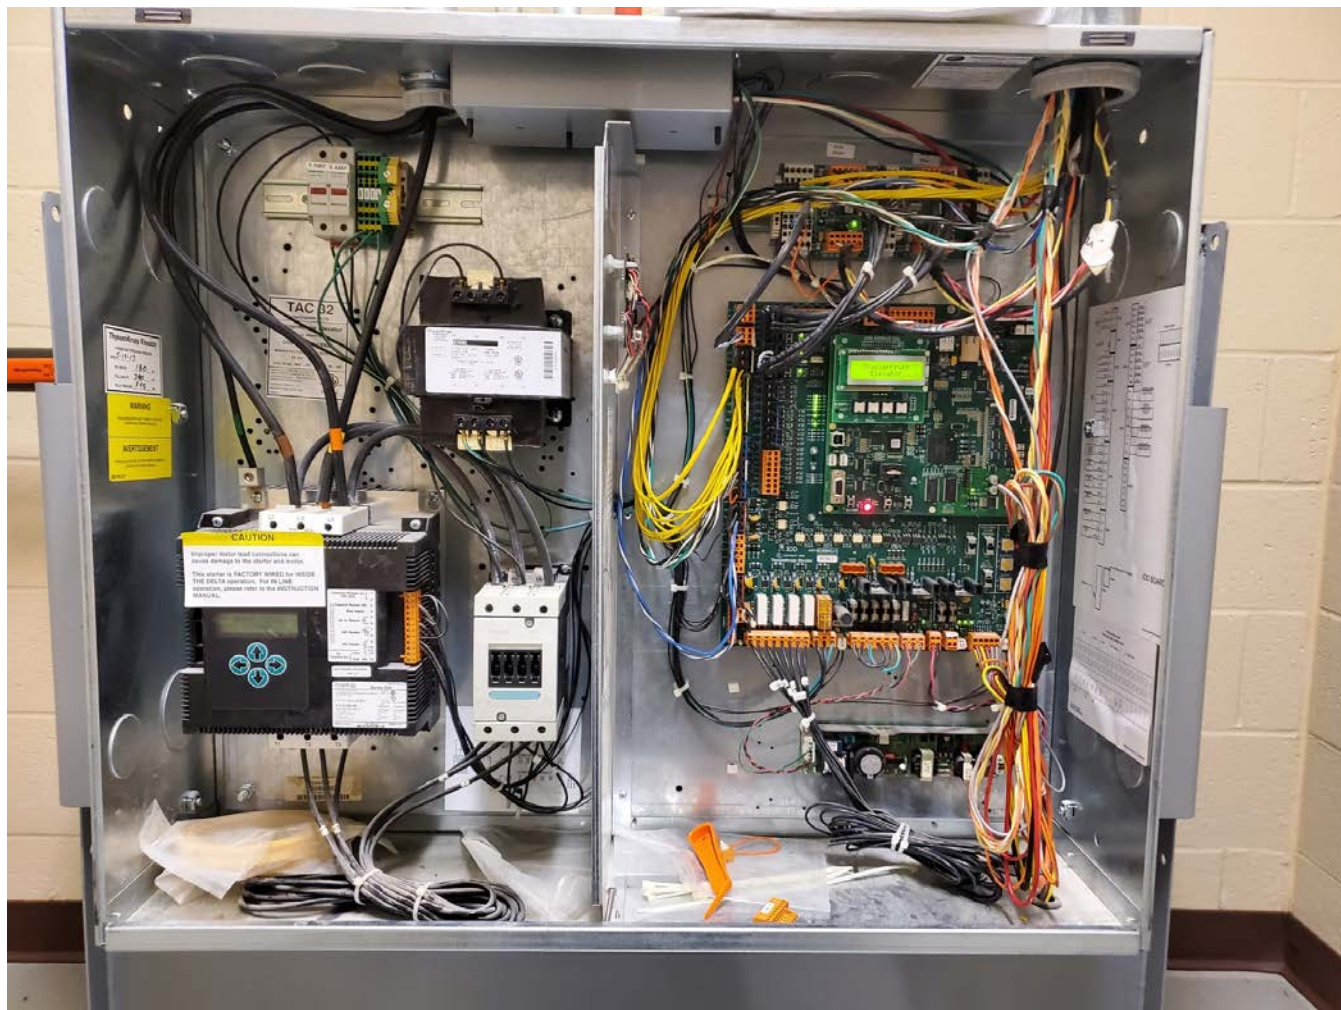

## ThyssenKrupp Elevator Hydraulic Power Unit

FILE LR14538



MAX. VAC = 600

|                  |         |              |        |
|------------------|---------|--------------|--------|
| MODEL            | EP12540 | MAX. HP/kW = | 75/56  |
| DATE             | 2/11/12 | SERIAL NO.   | EAX006 |
| PUMP MAKE        | IMO     | PUMP MODEL   | 217    |
| FLOW RATE        | 125     | GPM          | L/s    |
|                  |         |              | 7.9    |
| WORKING PRESSURE | 429     | PSI          | kPa    |
|                  |         |              | 2958   |
| RELIEF PRESSURE  | 536     | PSI          | kPa    |
|                  |         |              | 3696   |

USE OIL 150 SSU @ 100 F OR 32.4  
 cSt @ 38° C. MIN. V.I. 95      1 PSI = 6.895 kPa

CSA B44.1/ASME A17.5      606DF2

## ThyssenKrupp Elevator

SUBMERSIBLE AC MOTOR           FILE NUMBER LR14538  
 MADE IN USA      606DB2

|                              |           |                         |           |         |  |
|------------------------------|-----------|-------------------------|-----------|---------|--|
| MODEL NO. 590AJ3             |           | SERIAL NO. 020212154448 |           |         |  |
| VOLTS 460                    | AMPS 52.7 | HP 40                   | FRAME 180 | TYPE EP |  |
| OEM PART NO. 7502AB25        |           | CODE F                  | RPM 3410  | PH 3    |  |
| DUTY 80 STS/HR 30% TIME ON   |           | HZ 60                   | AMB 70 C  | INS F   |  |
| ODE BEARING NUMBER: 25BC02J3 |           | SERVICE FACTOR: SPECIAL |           |         |  |

### MOTOR WINDING CONNECTION DIAGRAM

|           |        |        |        |            |  |
|-----------|--------|--------|--------|------------|--|
| LINE      | L1     | L2     | L3     | TOGETHER   |  |
| WYE START | T1     | T2     | T3     | T4, T5, T6 |  |
| DELTA RUN | T1, T6 | T2, T4 | T3, T5 |            |  |

**Receipt of Addendum No. 2  
Bid Invitation No. 4364 is hereby acknowledged:**

(Firm Name) \_\_\_\_\_

(Signature) \_\_\_\_\_

(Printed Name) \_\_\_\_\_

(Date) \_\_\_\_\_

**BIDDERS MUST RETURN THE ABOVE ACKNOWLEDGEMENT  
OF RECEIPT OF ADDENDUM NO. 2 WITH THEIR BID.**